


Cushion Trax® Mat Roll, per metre

FLME189 Not for Chemical Contact, Not for Oil/Grease Contact, 152cm x 14mm

Get maximum durability and fatigue relief in harsh work environments with this 14 mm thick worker platform.

- Recommended for heavy duty use in dry industrial environments
- Diamond plate pattern provides traction while allowing easy twist turns
- Features RedStop™ slip-resistant backing to prevent mats from shifting during use
- Uni-Fusion™ technology, with a hard wearing top surface laminated onto a resilient micro-cellular vinyl base, is engineered to work in the harshest work environments
- Sold per metre, you can customize your mat length to your workplace with clean, factory-cut edges; maximum full roll length is 22.8m
- All 4 sides are bevelled and sealed to minimise tripping hazards
- Available with yellow borders along sides for added safety
- Slip resistance R10 according to DIN51130 and BG-rule BGR181
- Tested and certified by the National Floor Safety Institute (NFSI)
- Fire classification Bfl-S1 tested according to EN 13501-1
- Free of DOP, DMF, ozone depleting substances, silicone, and heavy metals; safe for vehicle-painting facilities

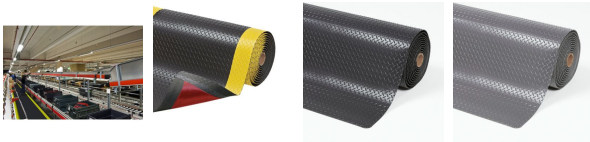

Specifications

Dimensions	152cm W x 14mm H
Bevelled Edge	Yes
Grit Surface	No
Modular	No
Safe for Welding Areas	No
Sold as	1 each
Weight	9.8 kg
Composition	PVC

Application	Dry Applications
Chemical Contact	Not for Chemical Contact
Oil/Grease Contact	Not for Oil/Grease Contact
Static Dissipative	No
Water Contact	Non-Draining

Technical Information

Certifications, Approvals and Ratings

NSFI Certified,DIN51130 - R10,BGR181 - R10



Hogs Hill • Watt Place • Hamilton International Technology Park • Blantyre • Glasgow • G72 0AH
0800 919 900 • newpig.co.uk • pigpen@newpig.com