


PIG® Frameless Storm Drain Filter

FLT615 Filters Oil; Sediment; Trash; Debris, For Storm Drains from 61cm to 122cm W & 61cm to 137cm L; Round Drains from 61cm to 122cm Dia., 137cm x 152cm x 43cm

New and improved ""witches hat"" drain guard design! Catch basin insert protects drains of all sizes in high-traffic areas with better filtering of oil, sediment, debris and trash from stormwater runoff.

- New! Redesigned for better filtration, improved handling and all-around performance
- Frameless design is ideal for small drains of any shape, even shallow drains
- Heavy-duty, hi-viz strap allows easier handling and removal
- Four-stage filtration process treats more water and removes more oil than basic storm drain filters
- Overflow ports help prevent blockage during high water flow
- Fits circular drain sizes 61cm to 122cm in diameter
- Fits irregular, rectangular and square drain sizes 61cm to 122cm width to 61cm to 137cm length
- Trim product to allow 7-8cm of material to extend above grate
- Pore size is 0.074 mm, 74 microns, 0.0029 inches or 200 sieve

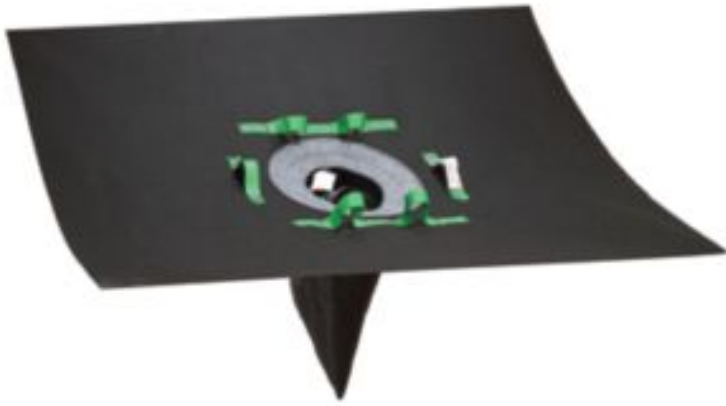

Specifications

Use With	Storm Drains from 61cm to 122cm W & 61cm to 137cm L; Round Drains from 61cm to 122cm Dia.
Colour	Black
Dimensions	137cm W x 152cm L x 43cm H
Absorbency	Up to 7.2 L
Installation	Installs below grate
Sold as	1 each
Weight	1.14 kg
New Pig Patent	10,508,430
# per Pallet	176

Composition

Insert Strips and Ring: Polyester;

Straps: Polyester

Filters

Oil; Sediment; Trash; Debris

Maximum Flow Rate

1,514 ltr./Minute

Technical Documents

[Instructions for Frameless Storm Drain Filter](#)

[Product Performance and Testing for PIG Frameless Storm Drain Filter \(Large\)](#)

[Environmental Protection Act 1990](#)

[The Control of Pollution Act \(1974\)](#)

[Water Resources Act 1991](#)



New Pig

World's best stuff for leaks, drips and spills.

Hogs Hill • Watt Place • Hamilton International Technology Park • Blantyre • Glasgow • G72 0AH

0800 919 900 • newpig.co.uk • pigpen@newpig.com