





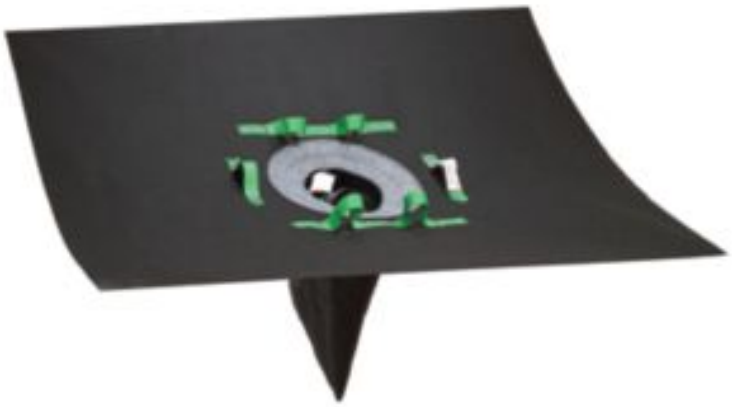



PIG® Frameless Storm Drain Filter

FLT615 Filters Oil; Sediment; Trash; Debris; Floatables, For Storm Drains from 61cm to 122cm W & 61cm to 137cm L; Round Drains from 61cm to 122cm Dia., 137cm x 152cm x 43cm

New and improved ""witches hat"" drain guard design! Catch basin insert protects drains of all sizes in high-traffic areas with better filtering of oil, sediment, debris and trash from stormwater runoff.

– New! Redesigned for better filtration, improved handling and all-around performance
– Frameless design is ideal for small drains of any shape, even shallow drains
– Heavy-duty, hi-viz strap allows easier handling and removal
– Four-stage filtration process treats more water and removes more oil than basic storm drain filters
– Overflow ports help prevent blockage during high water flow
– Fits circular drain sizes 61cm to 122cm in diameter
– Fits irregular, rectangular and square drain sizes 61cm to 122cm width to 61cm to 137cm length
– Trim product to allow 7-8cm of material to extend above grate
– Pore size is 0.074 mm, 74 microns, 0.0029 inches or 200 sieve

Use With	Storm Drains from 61cm to 122cm W & 61cm to 137cm L; Round Drains from 61cm to 122cm Dia.
Colour	Black
Dimensions	137cm W x 152cm L x 43cm H
Absorbency	Up to 7.2 L
Load Capacity	18kg
Installation	Installs below grate
Sold as	1 each
Weight	1.14 kg

New Pig Patent	10,508,430
# per Pallet	176
Composition	Insert Strips and Ring: Polyester; Straps: Polyester
Filters	Oil; Sediment; Trash; Debris; Floatables
Maximum Flow Rate	1,514 ltr./Minute

Technical Documents

Instructions for Frameless Storm Drain Filter

Product Performance and Testing for PIG Frameless Storm Drain Filter (Large)

Environmental Protection Act 1990

The Control of Pollution Act (1974)

Water Resources Act 1991

New Pig
World's best stuff for leaks, drips and spills.

Hogs Hill • Watt Place • Hamilton International Technology Park • Blantyre • Glasgow • G72 0AH
0800 919 900 • newpig.co.uk • pigpen@newpig.com