



Skystep™ Mat

FLME205 Not for Chemical Contact, Not for Oil/Grease Contact, 90cm x 120cm x 13mm

Get maximum fatigue relief with this high-quality standalone mat for medium-duty industrial environments.

- Recommended for medium-duty use in dry industrial environments
- Ergonomically engineered, SkyStep™ uses the power of air for superb anti-fatigue properties
- Suctions to the ground to prevent the mat from shifting
- Air pockets from the mat's bubble pattern, combined with the resiliency of the rubber, create an ultimate cushioning effect while keeping the mat lightweight
- Moulded edges on all four sides are bevelled to prevent tripping on the mat
- Made of 100% heavy-duty natural rubber compound, ideal for general purpose applications
- Slip resistance R9 according to DIN51130 and BG-rule BGR181
- Free of DOP, DMF, ozone depleting substances, silicone, and heavy metals; safe for vehicle painting facilities

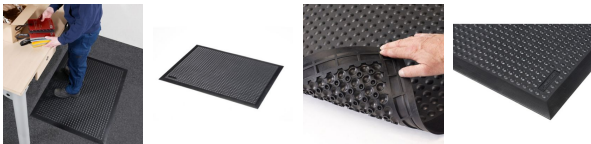

Specifications

| | |
|------------------------|----------------------------|
| Colour | Black |
| Dimensions | 90cm W x 120cm L x 13mm H |
| Bevelled Edge | Yes |
| Grit Surface | No |
| Modular | No |
| Safe for Welding Areas | No |
| Sold as | 1 each |
| Weight | 11.8 kg |
| Composition | 100% natural rubber |
| Application | Dry Applications |
| Chemical Contact | Not for Chemical Contact |
| Oil/Grease Contact | Not for Oil/Grease Contact |

| | |
|--------------------|--------------|
| Static Dissipative | No |
| Water Contact | Non-Draining |

Technical Information

Certifications, Approvals and Ratings

DIN51130 - R9,BGR181 - R9



Hogs Hill • Watt Place • Hamilton International Technology Park • Blantyre • Glasgow • G72 0AH
0800 919 900 • newpig.co.uk • pigpen@newpig.com