


# PIG® Drive-Over DrainBlocker® Drain Cover

PLR902 For Square Drains up to 30cm, 1 each

The toughest drain cover you can buy is the only one that can handle drive-overs - even from heavy tankers. Go ahead and drive over it!

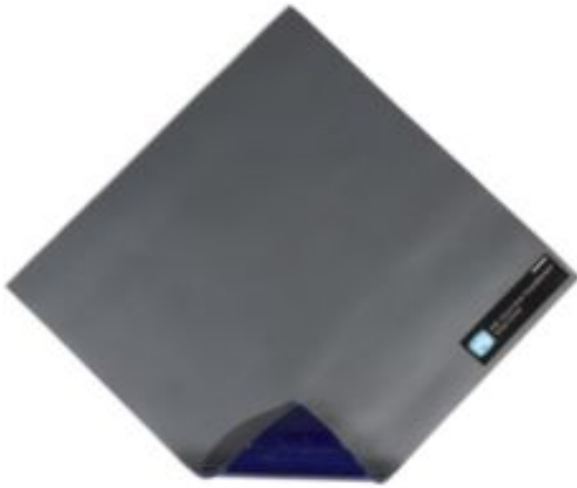

- Confidently block drains from spills and water with this outdoor drain cover's super-sealing bottom layer that conforms perfectly for a tight seal, while the HogHyde® rubber top layer withstands years and years of repeated heavy vehicle traffic
- Trust this drive-over drain cover—the proven-toughest on the market—to resist everything from punctures, stretching and tearing to prolonged exposure to weather, UV/IR light and oils like diesel fuel and petrol, plus many chemicals
- Use it how you need it, either leaving it down as a preventive measure in leak- and spill-prone areas or storing it for emergency spill response
- Ideal for long-term drain protection where liquid transfers, washdowns or other leak- and spill-prone jobs are common
- Maintain a professional look for longer since this drive-over drain cover is designed to wipe clean and get back on the job
- Includes a nylon storage bag for easy transportation and fast spill response



<b>Use With</b>	Square Drains up to 30cm
<b>Style</b>	Drive-over
<b>Colour</b>	Grey
<b>Dimensions</b>	76cm W x 76cm L x 1cm H
<b>Intended For</b>	Use on Smooth Surface
<b>Max liquid temp exposure</b>	Max Exposure Limit 107°C (225°F) for up to 30 Minutes
<b>Storage Temp Range</b>	Store from -18°C (0°F) to 49°C (120°F)
<b>Temperature Limit</b>	Works from -18°C (0°F) to 71°C (160°F) up to 12 months

<b>Sold as</b>	1 each
<b>Weight</b>	6.8 kg
<b>New Pig Patent</b>	8,117,686
<b># per Pallet</b>	77
<b>Composition</b>	Top - Co-Polymer Geomembrane; Bottom - Polyurethane
<b>Includes</b>	1 - PIG® Drive-Over DrainBlocker® Drain Cover 1 - Nylon Storage Bag
<b>UV Resistant</b>	UV Resistant

## Technical Documents

[Urethane Use, Care and Storage](#)

[Technical Data Sheet for PIG® Blocker Products](#)

[Environmental Protection Act 1990](#)

[Water Resources Act 1991](#)

## Disclaimers

[Urethane Notice](#)

Due to the nature of softer urethane, the physical properties of these products may change over time with exposure to certain environmental conditions like temperature, humidity and UV radiation. Typical life expectancy is 5 years. Please inspect the stored product regularly to ensure it is in a usable state. For optimum performance, ensure that the area where the product will be deployed is free of debris, cracks and holes. For more details and for chemical compatibility, please call Technical Services.



Hogs Hill • Watt Place • Hamilton International Technology Park • Blantyre • Glasgow • G72 0AH  
0800 919 900 • [newpig.co.uk](http://newpig.co.uk) • [pigpen@newpig.com](mailto:pigpen@newpig.com)